



Standard Attachments

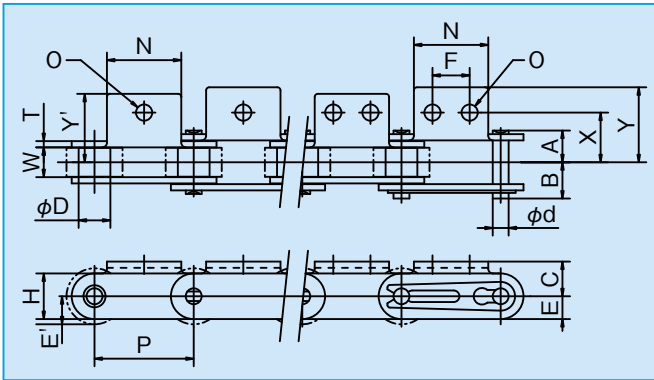

A-1 Attachments

K-1 Attachments

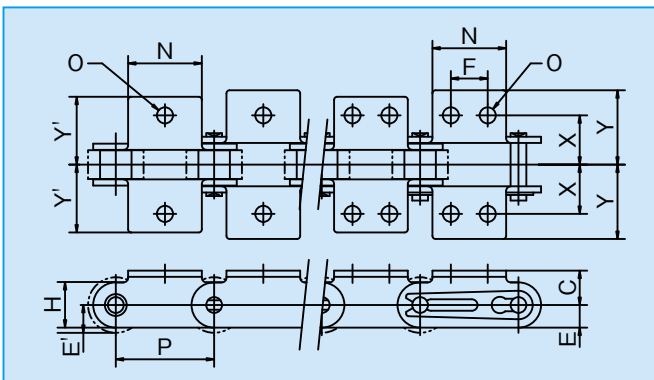

A-2 Attachments

K-2 Attachments



○ Dimensions

[Unit: mm]

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	Pin			Link Plate		Standard/Rustop (N)			Stainless steel (SS)		Links of 1 unit
				Dia. d	A	B	Thickness T	Height H	Ave. Tensile Strength kN (kgf)	Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)	Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)	
KCM C2040 KCM C2042	25.40	7.95	7.92 15.88	3.97	8.05	9.6	1.5	11.7	17.2 (1,750)	2.63 (270)	0.48 0.82	0.44 (45)	0.49 0.83	120
KCM C2050 KCM C2052	31.75	9.53	10.16 19.05	5.09	10.15	11.65	2.0	14.6	27.9 (2,850)	4.31 (440)	0.79 1.25	0.69 (70)	0.83 1.28	96
KCM C2060 KCM C2062	38.10	12.70	11.91 22.23	5.96	12.70	15.40	2.4	17.5	39.5 (4,000)	6.28 (640)	1.12 1.79	1.03 (105)	1.19 1.88	80
KCM C2060H KCM C2062H	38.10	12.70	11.91 22.23	5.96	14.25	15.75	3.2	17.5	39.5 (4,000)	6.28 (640)	1.43 2.11	1.03 (105)	1.46 2.14	80
KCM C2080 KCM C2082	50.80	15.88	15.88 28.58	7.94	16.15	19.25	3.2	23.0	68.6 (7,000)	10.69 (1,090)	1.88 2.92	1.77 (180)	2.08 3.13	60
KCM C2080H KCM C2082H	50.80	15.88	15.88 28.58	7.94	17.70	20.80	4.0	23.0	68.6 (7,000)	10.69 (1,090)	2.37 3.41	1.77 (180)	2.44 3.50	60
KCM C2100H KCM C2102H	63.50	19.05	19.05 39.67	9.54	21.75	24.70	4.8	28.9	106.9 (10,900)	17.06 (1,740)	3.53 5.68	2.55 (260)	3.74 5.98	48

NOTE: Connecting links for the KCM C2080 or larger models use split pins.


○ Dimensions

[Unit: mm]



KCM Chain No.	Attachments									Additional Weight per Attachment (kg)	
	N	O	C	E(E')	X	PL side Y	RL side Y'	F	A-1, A-2	K-1, K-2	
KCM C2040 KCM C2042	19.1	3.6	9.1	5.9 (7.9)	12.7	19.0	17.4	9.5	0.003	0.006	
KCM C2050 KCM C2052	23.8	5.2	11.1	7.3 (9.5)	15.9	24.0	21.9	11.9	0.007	0.014	
KCM C2060 KCM C2062	28.6	5.2	14.7	8.8 (11.1)	21.45	29.6	27.0	14.3	0.013	0.026	
KCM C2060H KCM C2062H	28.6	5.2	14.7	8.8 (11.1)	21.45	31.8	28.4	14.3	0.016	0.032	
KCM C2080 KCM C2082	38.1	6.8	19.1	11.5 (14.3)	27.8	41.1	37.0	19.1	0.028	0.056	
KCM C2080H KCM C2082H	38.1	6.8	19.1	11.5 (14.3)	27.8	41.1	37.0	19.1	0.033	0.066	
KCM C2100H KCM C2102H	47.6	8.7	23.4	14.5 (19.8)	33.3	50.0	45.0	23.8	0.063	0.126	

NOTE: KCM attachment chains are available in stainless steel in the same dimensions.



Standard Attachments

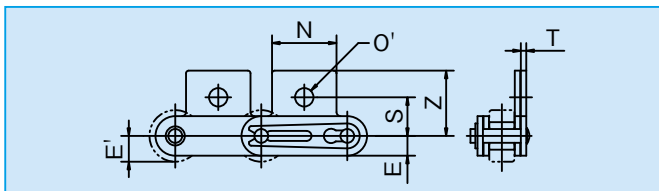



SA-1 Attachments

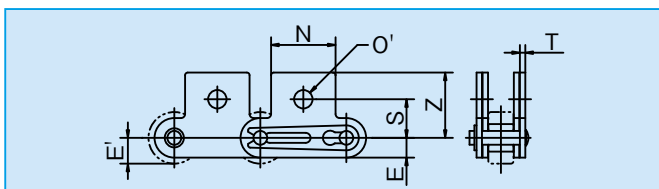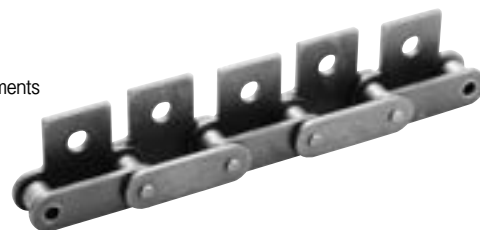


SK-1 Attachments

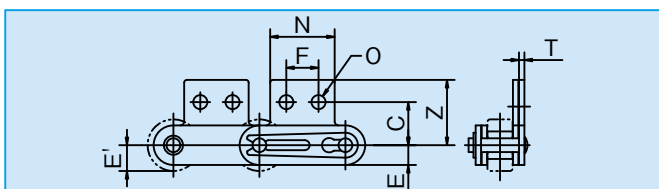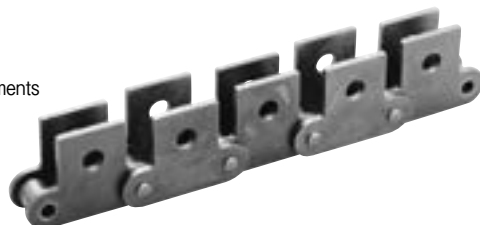

SA-2 Attachments

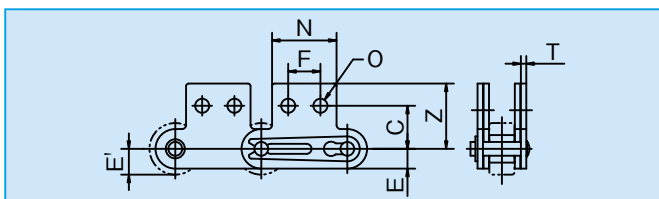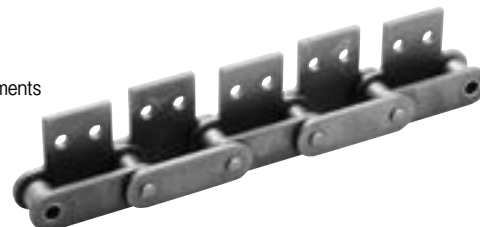

SK-2 Attachments

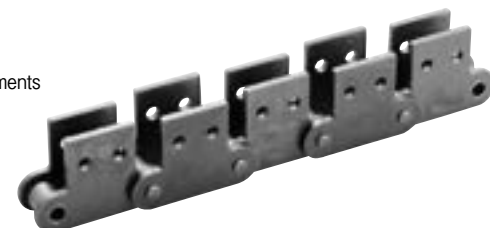

○ Dimensions

[Unit: mm]

KCM Chain No.	Attachments								Additional Weight per Attachment (kg)	
	N	O	O'	C	S	E(E')	Z	F	SA-1, SA-2	SK-1, SK-2
KCM C2040 KCM C2042	19.1	3.6	5.2	13.5	11.1	5.9 (7.9)	19.75	9.5	0.003	0.006
KCM C2050 KCM C2052	23.8	5.2	6.8	15.9	14.3	7.3 (9.5)	24.55	11.9	0.006	0.012
KCM C2060 KCM C2062	28.6	5.2	8.7	19.05	17.5	8.8 (11.1)	31.05	14.3	0.013	0.026
KCM C2060H KCM C2062H	28.6	5.2	8.7	19.05	17.5	8.8 (11.1)	31.05	14.3	0.016	0.032
KCM C2080 KCM C2082	38.1	6.8	10.3	25.4	22.2	11.5 (14.3)	40.8	19.1	0.027	0.055
KCM C2080H KCM C2082H	38.1	6.8	10.3	25.4	22.2	11.5 (14.3)	40.8	19.1	0.031	0.062
KCM C2100H KCM C2102H	47.6	8.7	13.5	31.75	28.6	14.5 (19.8)	50.8	23.8	0.053	0.106

NOTE: KCM attachment chains are available in stainless steel in the same dimensions.