



Plastic top plates can be snapped on the roller chains to easily form slat conveyor. The SUC type can be bent to allow curved travel.

NOTE: It is required to design the return portion, bearing in mind that the amount of back bend is limited.

SUC Type

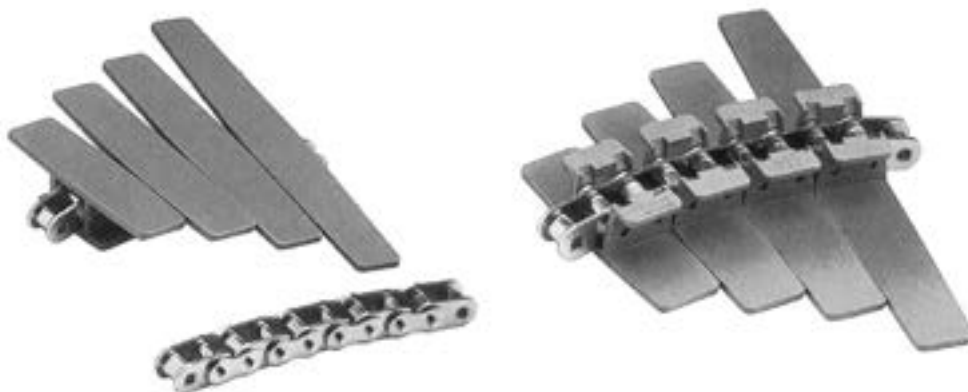

SU Type

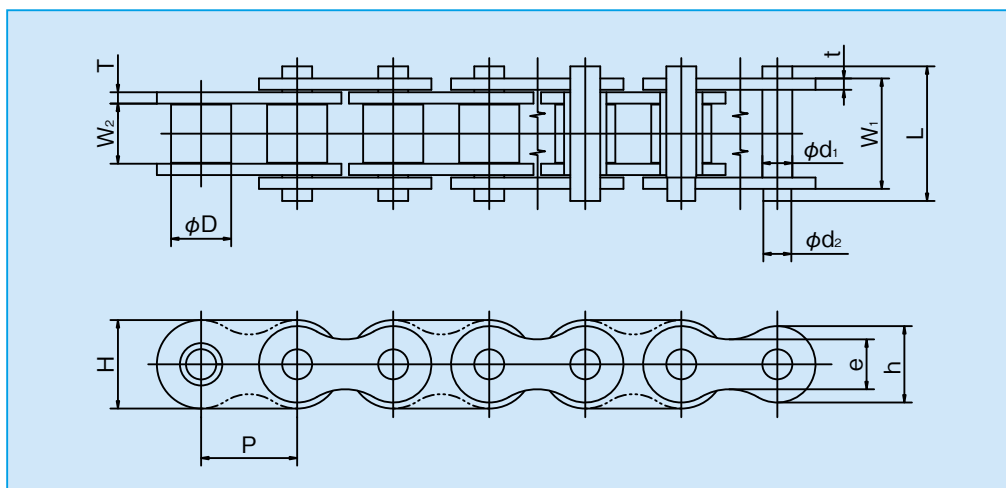

○ Dimensions

[Unit: mm]

KCM Chain No.	Pitch P	Width between Inner Plates W <sub>2</sub>	Width between Outer Plates W <sub>1</sub>	Roller Dia. D	Pin			Link Plate					Min. Horizontal Bending Radius R	Approx. Weight (kg/m)	Links of 1 unit
					d <sub>1</sub>	d <sub>2</sub>	L	H	h	e	T	t			
※KCM 40 SU	12.70	7.95	14.6	7.92	3.97	3.70	17.80	11.7	10.1	6.6	1.5	1.5	—	0.65	240
KCM 60 SU	19.05	12.7	22.7	11.91	5.96	5.80	28.80	17.5	15.0	11.7	2.4	2.4	—	1.51	160
KCM 60 SUC	19.05	12.7	22.8	11.91	5.09	4.80	28.80	17.5	15.0	11.7	2.4	2.0	500	1.37	160

NOTE: Only inner link plates of the KCM40SU are of gourd shape.