


The KCM CA-type roller chains are mainly employed for power transmission over relative long shaft-to-shaft distance at low speed and used with attachments, especially in large-sized farm machines.

CA Type

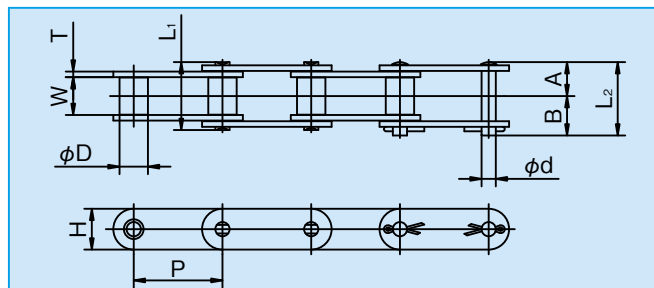

○ Dimensions

[Unit: mm]

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	Pin					Link Plate		Ave. Tensile Strength kN (kgf)	Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)
				Dia. d	A	B	(A+A) L <sub>1</sub>	(A+B) L <sub>2</sub>	Thickness T	Height H			
<b>KCM CA550</b>	41.40	20.40	16.66	7.13	17.0	20.55	34.0	37.55	2.6	19.0	42.7 (4,350)	6.08 (620)	1.86
<b>KCM CA557</b>	41.40	20.40	17.78	8.00	18.7	21.55	37.4	40.25	3.1	22.0	60.8 (6,200)	8.63 (880)	2.41
<b>KCM CA620</b>	42.01	25.20	17.68	7.13	20.5	24.05	41.0	44.55	3.1	19.0	51.0 (5,200)	7.26 (740)	2.28